



CHRISTIE® BRIO Enterprise




Dans un environnement dynamique où toutes les décisions comptent, Christie® BRIO permet d'organiser des réunions efficaces réunissant toutes les informations critiques dans un même environnement. Les outils de partage et la facilité de communication permettent aux décideurs de se concentrer rapidement sur ce qui compte le plus. Avec Christie® BRIO, vous partagez tout simplement plus.



Les avantages du Christie® Brio Enterprise

- Partage jusqu'à 5 sources HD en simultané dans leurs résolutions natives, sans déformation
- Utilisation ultra simple, ne nécessitant aucune formation
- Pas de Dongle à casser ou à égarer
- Aucune installation logicielle ou de drivers requis pour les présentateurs
- Fonction Multi-site pour partager vos documents avec des participants où qu'ils soient !
- Supporte nativement : Network Projector (*Microsoft*), AirPlay (*Apple*), et Brio Screen Projector for Android 5
- Gestion de 2 écrans tactiles pour une collaboration intuitive
- Interface Web permettant entre autres la personnalisation de la page d'accueil de la source

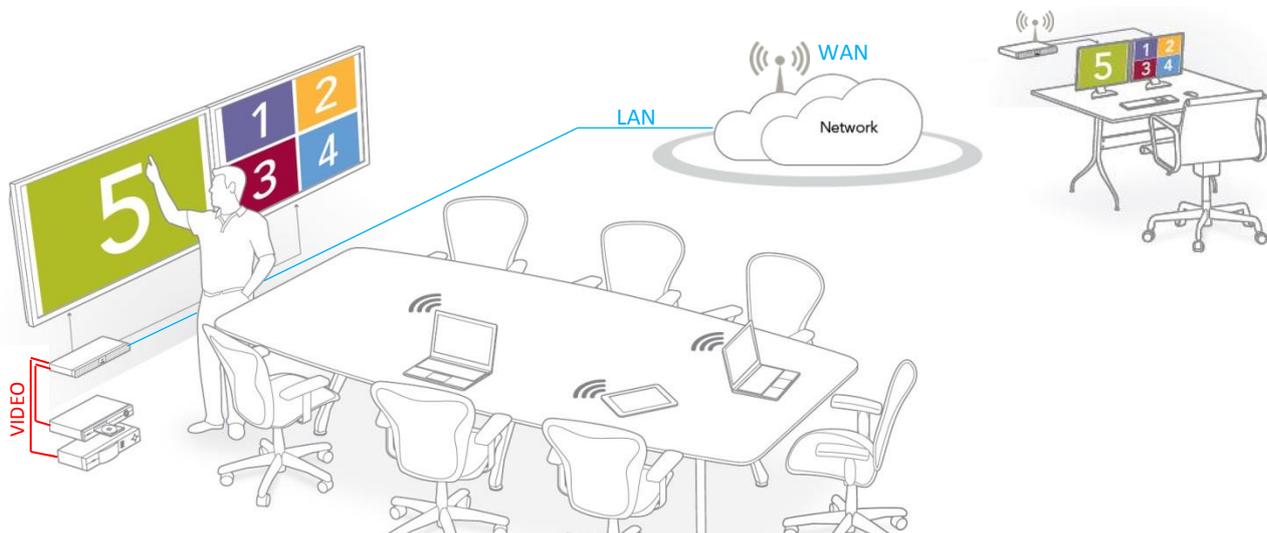



CHRISTIE® BRIO - Caractéristiques techniques

	Christie Brio Enterprise and Team+	Christie Brio Team
Outputs	• 2 DisplayPort: Up to 2560 x 1600 pixels per output	
Inputs	<ul style="list-style-type: none"> • 2 DVI-D: Support for up to 2560 x 1600 pixels per input (wired connection) • Up to 5 video sources from 640 x 480 to 1920 x 1080 encoded to H.264 • 2 analog 3.5mm stereo audio • Up to 5 audio encoded streams to H.264 • Support for HDCP (High-bandwidth Digital Content Protection) • 4 USB ports 	<ul style="list-style-type: none"> • Up to 5 video sources from 640 x 480 to 1920 x 1080 encoded to H.264 • Up to 5 audio encoded streams to H.264 • 4 USB ports
Network	<p>Christie Brio Enterprise</p> <ul style="list-style-type: none"> • Gigabit Ethernet: 1000 Mbps Ethernet, RJ-45 connector. Support for IGMPv2, IPv4, RTSP, SRTP, HTTP, TCP/IP <p>Christie Brio Team+</p> <ul style="list-style-type: none"> • Internal 2.4 GHz wireless access point • IEEE 802.11 a/b/g/n standard • 2Tx/2Rx MIMO • Up to 300 Mbps data rate • 64/128/152 bit WEP, WPA, WPA2, 802.1x, AES & TKIP 	<ul style="list-style-type: none"> • Internal 2.4 GHz wireless access point • IEEE 802.11 a/b/g/n standard • 2Tx/2Rx MIMO • Up to 300 Mbps data rate • 64/128/152 bit WEP, WPA, WPA2, 802.1x, AES & TKIP
Protocols supported	<ul style="list-style-type: none"> • Airplay • MS network projector • Brio screen projector (for use with MS Windows or Android devices) 	
Encoding	<ul style="list-style-type: none"> • 2 high-definition DVI-D inputs to L5 H.264 video streams @ 30 FPS • 2 stereo audio streams 	<ul style="list-style-type: none"> • Up to 5 high-definition L5 H.264 video streams @ 30 FPS • Support for variable bitrate
Decoding	• Up to 5 high-definition network video streams @ 30Hz	
Sound pressure (0.5m distance)	• 40.7dBA max • 39.2dBA max	
Power	voltage range	• 100-240VAC (auto-ranging power supply)
	current	• 2-4A (max) • 2A
	power consumption	• 220W (max) • 120W (max)
	dissipation	• 750 BTU/hr (max) • 410 BTU/hr (max)
Physical	size	• (WxHxD): 17.40 x 1.74 x 9.5" (442 x 44 x 241mm) • (WxHxD): 8 x 1.9 x 8.9" (204 x 49 x 252mm)
	chassis	• 1U form factor
	mounting	• Optional rack ears • Optional under table mount • Optional VESA "sandwich" mount
	weight	• 6.5lbs (2.95kg) • 2.8lbs (1.27kg)
Reliability	• MTBF>50,000 hours for major modules	
Regulatory	<ul style="list-style-type: none"> • CAN/CSA C22.2 No. 60950-1 • UL 60950-1 • IEC 60950-1 emissions • FCC CFR47, Part 15, Subpart B, Class A –unintentional radiators • EN55103-1 Class A audio, video, audio-visual equipment emission; EN55103-2 audio video, audio-visual equipment immunity; EN61000-3-2, EN61000-3-3 • Directives: (EC) 2011/65/EU (RoHS); 2012/19/EU (WEEE) • Regulation: (EC) No. 1907/2006 (REACH) • Certification marks (check with Christie for latest update): cULus (Canada & US), CE (EU), CCC (China), Saudi Arabia, South Africa, Ukraine, Mexico, GoST-R (Russia) and/or Customs Union which includes Belarus, Kazakhstan, Russia, KC (Korea), S-Mark (Japan), C-Tick (Australia & New Zealand) Taiwan 	
Manufacturing location	• Designed, manufactured and tested by Christie Digital Systems USA, Inc.'s facility in Phoenix, Arizona, USA	
Warranty	• Limited two years parts and labor	